


O'zbekiston

Kompozitsion **M**ateriallar

Ilmiy-texnikaviy va amaliy jurnali

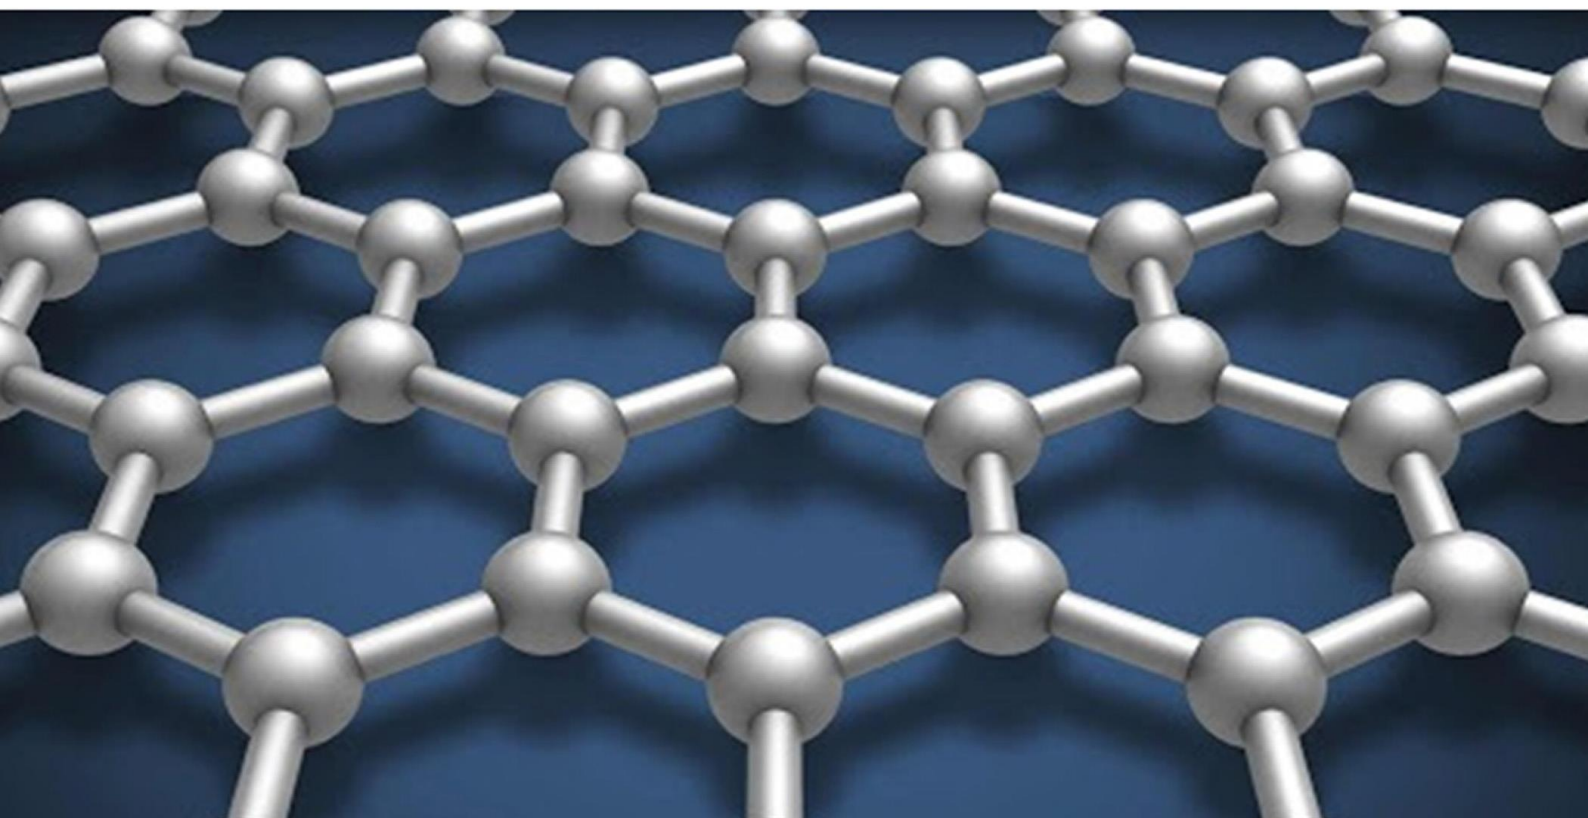

Узбекский научно-технический и производственный журнал
Композиционные материалы

Калит сўзлар: Эпокси олигомерлар,полиуретан, ИҚ спектроскопия, молеин ангидрид, полиэтиленполиамин – ПЭПА, органоминарал тўлдирувчилар – графит, тальк, каолин, резина кукуни, пластификаторловчи моддалар.

Ключевые слова: Эпоксидные олигомеры, полиуретан, ИК-спектроскопия, молекулярный ангидрид, полиэтиленполиамин - ПЭПА, органоминаральные наполнители - графит, тальк, каолин, каучуковый порошок, пластификаторы.

Key words: Epoxy oligomers, polyurethane, IR spectroscopy, moleic anhydride, polyethylene polyamine - PEPA, organomineral fillers - graphite, talc, kaolin, rubber powder, plasticizers.

Наврузов Фарход Маматкулович
Негматов Сойибжан Содиқович

– EMU UNIVERSITY Кимё фанлари кафедраси мудири
– т.ф.д., профессор, ЎзР ФА академиги. “Kompozit nanotexnologiyalar” илмий-техника маркази бош директори
– Фармацевтика институти Аналитик кимё кафедраси доценти
– EMU UNIVERSITY ассистенти
– ЎзМУ кимё факултети Аналитик кимё кафедраси доценти

Мухамедова Бусора Ибрагимовна
Назаров Аббос Уралович

Тоджиев Жамолиддин Насириддинович

UDK 539.537:521

ANALYSIS AND STUDY OF A NEWLY DEVELOPED CORROSION INHIBITOR FROM THE RECYCLING OF ORGANOCHLORINE WASTE

J.A. Xalilov, S.S. Shukurov, F.N. Nurqulov, A.T. Djalilov

Introduction. Corrosion is the second leading cause of many industrial deaths. The causes of equipment failure in the oil and gas industry were evaluated from a 1993 survey (Ratnayake, 2012). Corrosion accounted for 60% of all maintenance costs for production platforms in North Sea oil and gas equipment (Steinsmo and Heggelung, 1993). One of the world's leading oil and gas companies announced in a 2003 survey that annual corrosion costs were \$900 million (Thams and Al Zahrani, 2006). Another survey conducted in 2006 found that corrosion in the oil and gas industry in the United States cost up to \$1.372 billion annually (Simmons, 2008). These data show that the economic consequences of corrosion in the oil and gas industry over the years are enormous. The global cost of corrosion in the oil and gas industry will increase further in the near future due to very high energy demand (Finsgar and Jackson, 2004) [1].

Phosphorus-nitrogen containing oil-soluble corrosion inhibitors are hydrophobic surfactants that fill the pores, increase inhibitor absorption by liquid hydrocarbons, and increase corrosion resistance [2].

Corrosion of metals is one of the urgent technical and economic problems. The loss of metal equipment, products and structures due to corrosion is about 2-4% of the gross national product. In addition, in the petrochemical and chemical industry, as a result of the corrosion of equipment, toxic chemical products are released, and as a result, they pollute the atmosphere, water sources, and soil [3].

Materials and methods. The physico-chemical properties and analysis results of our PF-1 brand corrosion inhibitor with this synthesized new composition were studied. In order to study the inhibition efficiency of corrosion inhibitors, practical experiments were carried out in hermetically sealed containers with a capacity of 1000 ml. An electrochemical method was used to determine the inhibition efficiency, and the practical experiments were carried out for 2 hours.

The inhibition mechanism and effectiveness of corrosion inhibitors were also studied by measuring the polarization curve outputs in the CS-350 potentiostat. In this case, it is possible to determine the inhibition efficiency of the surface of the steel electrode from the difference between the potentials of the steel in the solution with and without the inhibitor. Current supplied to this process is also called corrosion current. We can see that the amount of corrosion current is significantly reduced as a result of the inhibition of the surface of the steel electrode in solutions containing a corrosion inhibitor.

According to it, the product formed by the interaction of chlorinated organic waste with ammonia was placed in a three-necked flask equipped with a reflux condenser, a thermometer and a stirrer, vegetable oil was added and a homogeneous mass was formed.

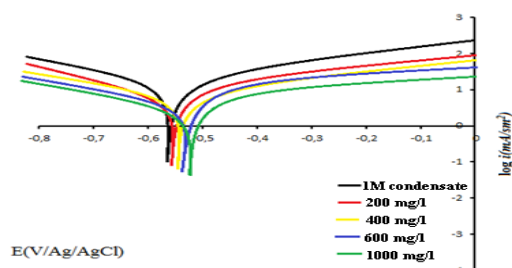


Figure-1. Polarization curves of PF-1 corrosion inhibitor at different concentrations in 1 M condensate medium for 2 hours at 298 ± 1 K for St3 grade steel

Result and discussion. Electrochemical experiments were carried out on steel plate geometrical samples. A solution of Ag/AgCl was used as the standard electrode. In this the value of the corrosion current of the solution containing the corrosion inhibitor obtained on the basis of the treatment of organochlorine waste, which we investigated, was different depending on the type of inhibitor and the environment. This value decreased with increasing concentration of corrosion inhibitor.

As can be seen from Figure-2, the curves shifted towards the lower current density in the presence of inhibitors, which indicates that the inhibition efficiency of the corrosion inhibitor is higher in the condensate environment.

As the concentration of PF-1 brand corrosion inhibitor in the solution increases, the electrical resistance of the solution also increases, as a result, the potential of the corrosion current value also decreases and the corrosion current value decreases to 0.095 ± 0.01 i, (mA/cm²). When the concentration of PF-1 corrosion inhibitor was 1000 mg/l, its efficiency was 91.23% in a 1M condensate environment.

The electrochemical analysis of this PF-1 brand corrosion inhibitor in gasoline environment was studied and the potential curves were analyzed.

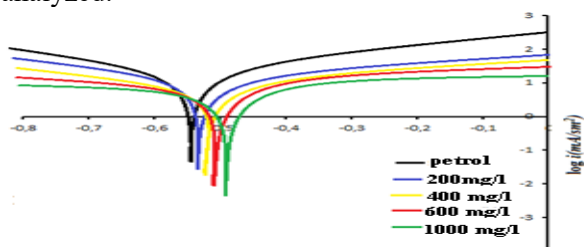


Figure-2. Polarization curves for steel grade St3 recorded for 2 hours at 298 ± 1 K at different concentrations of corrosion inhibitor PF-1

In Figure-3, the corrosion current value of the solution with and without PF-1 corrosion inhibitor decreased from 0.98 ± 0.11 i, (mA/cm²) to 0.08 ± 0.001 i, (mA/cm²). PF-1 brand corrosion inhibitor showed 95.47% efficiency in gasoline environment.

This was investigated using SEM of the ST3 steel grade we used in the test.

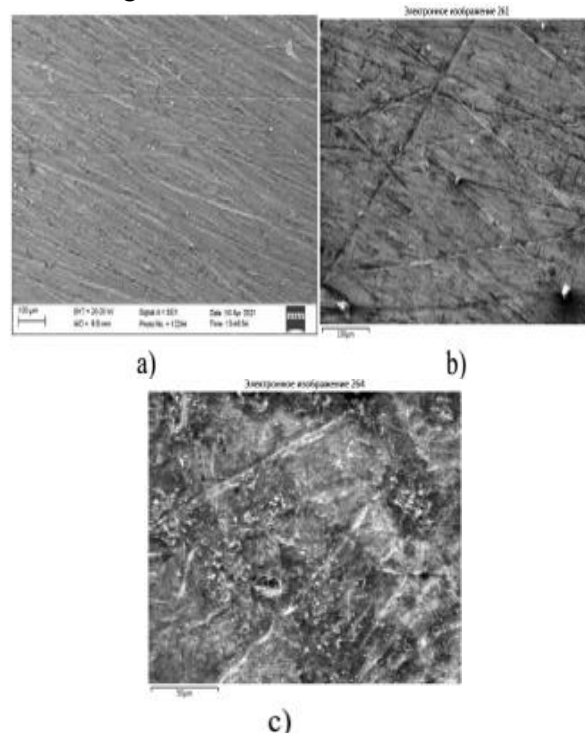


Figure-3. SEM view of ST3 steel sample a) pure metal, b) inhibitory environment, c) non-inhibitory condensate environment

In our research results obtained by scanning electron microscope, we can see that the PF-1 brand corrosion inhibitor we researched protects the metal surface from corrosion.

Conclusion. According to the electrochemical test results of this method, a series of tests from the low-concentration test program were conducted. The level of protection in the condensate environment at a concentration of 1000 mg/l was 91.23%, and the level of protection in the gasoline environment was 95.47%.

PF-1 brand corrosion inhibitors can be used in oil, gas, gas condensate wells, well drilling, oil and fatty acid production.

REFERENCE:

1. "High temperature sweet corrosion and inhibition in the oil and gas industry: Progress, challenges and future perspectives" I.B. Obot, Ikenna B. Journal Pre-proof September 2019.
2. "Downhole corrosion inhibitors for oil and gas production – a review" Journal "Applied Surface Science Advances" M. Askari, 2021

ИЮНЬ	№ 2(95)	2023
------	---------	------

СОДЕРЖАНИЕ

1. Химия и физикохимия композиционных материалов и нанокмпозитов

А.С. Менглиев, Г.А. Ихтиярова. Определение физико-химических свойств хитозана полученного из <i>Apis mellifera</i>	3
К.С. Негматова, Х.Ю. Рахимов, Ж.Н. Негматов, С.С. Негматов, Н.Г. Халматова. Исследование физико-химических и технологических свойств нефтеэмульсионного бурового раствора с композиционным химическим реагентом – эмульгатором.....	5
С.Ё. Иноғомов, Г.Г. Тожибаев, Ф.Ж. Абед. Куритилган тиканли ковул « <i>Capparis spinosa L.</i> » доривор ўсимлиги мевасини кимёвий таркибини ўрганиш.....	7
Ш.Ш. Шадиева, О.У. Нурова, М.Р. Амонов. Оҳорловчи полимер композицияларни ИҚ-спектроскопия ёрдамида ўрганиш.....	13
H.G'. Qurbonov, M.K. Rustamov, S.S. Mirzaolimova, S.S. Abdullayeva, D.A. Gafurova. Poliakrilonitril asosida polifunksional ion almashinuvchi material sintezi.....	16
Н.А. Максудова, Ю.А. Ахмеджанов. Нанотехнологии в производстве сверхпрочной стали.....	18
Р.Х. Сайдахмедов, А.Ф. Жаббаров, Г.Р. Саидахмедова. Изучение влияния карбида титана нестехиометрического состава в двухкарбидных сплавах на структуру, состав и свойства WC-TiC-Co.....	20
Д.М. Тиллаева, М.С. Шарипов. Исследование совместимости компонентов клеевых полимерных композиций предназначенные для производство гофрированных картонов.....	22
A. Hasanov, S. Negmatov, Sh. Munosibov, O. Usmankulov, Sh. Hojiyev. Texnologik oqova gazlarni ishqoriy eritmada absorbsiyalash jarayonini tadqiq qilish.....	26
Ш.Н. Киёмов, А.Т. Джалилов. Синтез олигомера, содержащего уретановых групп на основе этиленгликоля.....	30
A.S. Axmedov, N. Umirov. Akrlamid asosidagi gidrogellarning fizik-kimyoviy tadqiqi.....	33

2. Физико-механика и трибология композиционных материалов

Г.Ш. Жураева. Сравнение коррозионной стойкости слоистых материалов на основе меди и композитного медного сплава, полученных методом плазменной наплавки.....	36
М.И. Мамасалиева. Исследование антикоррозионных покрытий машиностроительного назначения.....	38
A.A. Allanazarov, Ch.A. Tursunov, A.N. To'rayev. WC kukuni donadorligini WC+CO qattiq qotishma namunalarining kaliyli tuz jinslarini kesishda yeyilishga bardoshligiga ta'sirini tadqiq qilish.....	40
Sh.T. Hojiyev, B.T. Berdiyarov, O.U. Nuraliyev. Temir kuyindilarini vorodotermik qayta ishlashning ba'zi termodinamik jihatlarini o'rganish.....	43
G.Sh. Jo'raeva, M.M. Djabbarova. Detallarning yuzasini tayyorlash va metallash usullari.....	46
P.T. Рузиев, А.А. Рахмонкулов, Ф.Н. Нуркулов, А.Т. Джалилов. Акрил-стирол таркибли қопламани иссиқликка чидамли сополимерни термик хусусиятларини тадқиқ этиш.....	48
Г.Т. Камилова, З.Б. Мирзарахимова, К.В. Гузашвили, З.Л. Алимбабаева. Определение адгезии твердосплавного покрытия со стальным основанием.....	51
N.J. Xamzayev, X.X. Turayev, A.S. Mukimov. "XANDIZA" qayta ishlash zavodining flotatsiya chiqindisi qo'shilgan sementning mexanik xususiyatlarini o'rganish.....	54
К.С. Негматова, Д.Х. Мусабеков, Д.Н. Раупова, Ю.К. Рахимов, Х.Ю. Рахимов. Исследование деэмульгирующих и поверхностных свойств разработанных композиционных реагентов для нефтепромыслов.....	57
Т.Р. Юлдашев. Моделирование процесса очистки углеводородных газов от кислых компонентов.....	59
С.С. Негматов, Ш.А. Шаабидов, Б.А. Иргашев. Износостойкость зубьев шестерен закрытых зубчатых передач.....	62
С.С. Негматов, Ш.А. Шаабидов, Б.А. Иргашев. Изменение скорости изнашивания зубьев шестерен в зависимости от модуля зацепления и вида упрочняющей обработки поверхности.....	65
Д.Я. Юлдашов, Д.А. Раимкулов, Ф.С. Дунназарова, И.С. Хайдаров, Х.Ф. Умаров. Влияние золь отходов новоанренской теплоэлектростанции на свойства девулканизаторов.....	67
К.К. Кадырбекова. Ионно-плазменные покрытия на основе нитридов переходных металлов с регулируемыми свойствами.....	70
У.Р. Бойназаров, Ш.М. Тураев, Ж.С. Ибрагимов. Некоторые свойства нитрид-оксидных диффузионных покрытий.....	73
Ш.А. Бозорбоев, Ж.Н. Негматов, Н.О. Умирова, Н.С. Абед, К.С. Негматова, Б.И. Хотамкулов. Исследование физико-механических свойств композиционных поливинилхлоридных полимерных материалов с использованием механоактивированного волластонитового наполнителя для применения в производстве линолеумов.....	77

3. Разработка и технология получения композиционных материалов

С.В. Быстров, Д.Б. Мирзавалиев. Получение и использование селена высокой чистоты.....	80
З.Д. Эрматов, Н.С. Дуняшин, Л.В. Гальперин, Б.Д. Юсупов, А.С. Саидахматов, М.М. Абдурахмонов. К вопросу исследования процесса раскисления металла при дуговой сварке низкоуглеродистых и низколегированных сталей.....	83
Ф.М. Наврузов, С.С. Негматов, Б.И. Мухамедова, А.У. Назаров, Ж.Н. Тоджиев. Эпоксид полимерлар ва полиуретан асосидаги ўзаро тикилувчи полимер тизимларнинг термодинамик мувофиқлиги ва структуравий хусусиятлари.....	85
J.A. Khalilov, S.S. Shukurov, F.N. Nurqulov, A.T. Djalilov. Analysis and study of a newly developed corrosion inhibitor from the recycling of organochlorine waste.....	88
Э.Н. Нуркулов. Акрил-стирол сополимер эмульсияси асосида олинган композитнинг каварикланиш коэффициентини ўрганиш.....	90