

O'zbekiston

Kompozitsion **M**ateriallar

Ilmiy-texnikaviy va amaliy jurnali



Узбекский научно-технический и производственный журнал

Композиционные материалы

УДК: (661.96):661.961

CERAMIC POROUS ABSORBER FOR A HYDROGEN STORAGE

M.M. Suleimanov, M.U. Nosirov, F.N. Ernazarov, M.S. Payzullakhanov, O.R. Parpiev,
J.Z. Shermatov, M. Pecherskaya

Introduction. Hydrogen, which has a unique set of physical and chemical properties, is widely used in various technological processes. High specific energy intensity (142 MJ/kg or 39 kWh/kg, which is three times more than traditional liquid hydrocarbons), the absence of harmful products from the oxidation of hydrogen with oxygen and the possibility of using it in fuel cells with an efficiency of more than 50% - all this contributes to rapid growth of research in the field of hydrogen energy technologies. However, one of the main problems preventing the practical use of hydrogen in many areas is the low efficiency of its storage and transportation.

Fuel cell power plants demonstrate the highest efficiency to date - up to 80%, and the average annual productivity of a fuel cell is 19710 kWh at a cost of 0.0766 \$/kWh [1]. Despite the fact that this cost exceeds the price of electrical energy supplied from the city power grid, the approach under consideration is of interest in conditions of shortage of electrical energy and natural gas.

It is important to note that determining the effectiveness of hydrogen absorber materials is based on several criteria: the ability to retain large quantities of hydrogen at room temperature, rapid release at moderate temperatures, resistance to cyclic use, and cost-effectiveness. To date, there is no material that would fully satisfy all these requirements. The search for new materials and various proposed solutions to this problem are actively discussed in recent review articles [1-5].

As part of our materials synthesis research, many compositions have been tested to produce porous ceramics. The goal of the work was the idea of a United States absorber based on an inexpensive porous material of a zeolite composition.

Methodology

The technology for producing porous ceramics included the following operations;

- preparation of a charge of a given composition;
- wet grinding in a ball mill;
- drying at 200°C;
- molding into tablets with a diameter of 20 mm;
- firing at a temperature of 1150°C for 2 hours;
- slow cooling in the oven.

Results and discussing

The resulting materials of aluminosilicate composition, synthesized from raw materials

melted in a solar furnace, had the following indicators

- density 375–550 kg/m³;
- specific surface 2500 cm²/g;
- exhibit compressive strength of 3.7–4.9 MPa.

Such materials can be used as hydrogen absorbers for the physical binding of hydrogen in pores by van der Wals forces at high (30–50 atm) pressures. These data, taking into account the hydrogen density value of 0.09 kg/m³ under normal conditions (300K, 1 atm), make it possible to calculate the aspect number for a porous material under normal conditions. The porosity of materials is a priori related to the property of water absorption. For materials of this composition, water absorption ranged from 10 to 23%, which indicates the corresponding porosity of the material. Thus, the higher the porosity, the more hydrogen the material absorbs. As can be seen from table. 1, the main components in the ceramic material are aluminum oxide 67 wt%, silicon oxide 25.2 wt%, and sodium oxide 6.9 wt%.

Table 1.
Chemical composition of the initial state of the raw material

Composition	Al ₂ O ₃	P ₂ O ₅	SiO ₂	Na ₂ O	Fe ₂ O ₃	SO ₃
Content, mass%	67.12	0.21	25.21	6.88	0.02	0.56

Figure 1 shows an X-ray diffraction pattern of the synthesized material based on aluminum oxide.

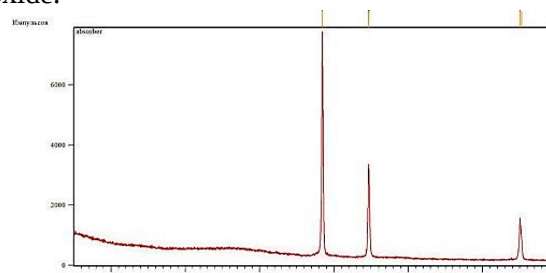


Fig.1. X-ray diffraction pattern of the synthesized material based on aluminum oxide.

Analysis of the X-ray diffraction pattern shows that the material is single-phase and has a zeolite structure of sodium aluminosilicate AlSiNaO with a lattice parameter $a = 4.056$ nm, space group Fm3m (it is not possible to obtain such data from the presented X-ray diffraction pattern).

Figure 2 shows the dependence of the aspect number on the temperature of hydrogen absorption.

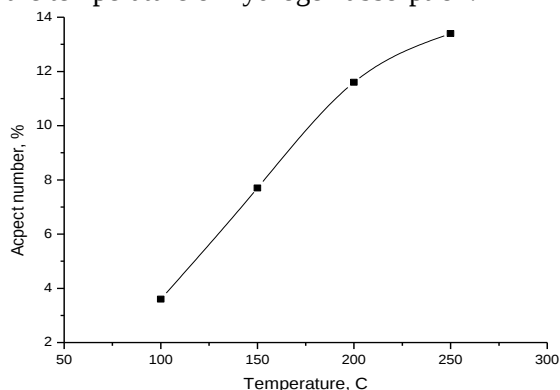


Fig.2. The dependence of the aspect number on the temperature of hydrogen absorption

An increase in the value of the aspect number with increasing temperature is observed: from 3.5 wt.% at 100°C to 13 wt.% at 190°C. (does not correspond to the graph) (also at the top you write that at 200 C 4.3 wt.%) was obtained.

This material is a good hydrogen absorber at a temperature of 190°C and the aspect number for it was 13.24 wt.%.

Now it is possible to evaluate the effectiveness of using ceramic porous absorbers in steel reactors. Let's say a cylindrical steel reactor with a height of 400 mm and a diameter of 300 mm has an internal volume of 0.028 m³.

At a given density of porous ceramics - 450 kg/m³, the mass of porous ceramics placed in the reactor: $0.028 \times 450 = 12.6$ kg.

This volume contains $450 \times 0.028 = 12.6$ kg of porous ceramics. If you saturate it with hydrogen at a pressure of 100 atm, then you can introduce up to $(12.6 \times 13.24)/100 = 1.67$ kg of hydrogen into it. If you use a steel cylinder as a container for storing hydrogen, then at a pressure of 80 atm you can introduce $9 \times 0.028 = 0.25$ kg of hydrogen into it.

Conclusion.

Thus, a porous material based on sodium aluminosilicate AlSiNaO with a lattice parameter $a=4.056$ nm is a good hydrogen absorber. With an increase in the temperature of the sorption process from 100°C to 190°C, the value of the aspect number increases from 3 wt.% to 13 wt.%

References

1. Armaroli, N., E. Bandini, and A. Barbieri, Hydrogen as an energy carrier: constraints and opportunities. Pure and Applied Chemistry, 2024. 96(4): p. 479-485.
2. Dornheim, M., et al., Research and development of hydrogen carrier based solutions for hydrogen compression and storage. Progress in Energy, 2022. 4(4): p. 042005.
3. Fruchart, D., et al., Hydrogen solid state storage on MgH₂ compacts for mass applications. Metals, 2023. 13(5): p. 992.
4. Jaiswal, A. and S. Sahu, Hydrogen Storage Challenge in the Hydrogen-Based Civilization, in Hydrogen Fuel Cell Technology for Mobile Applications. 2023, IGI Global. p. 157-181.
5. Nazir, G., et al., Recent advances and reliable assessment of solid-state materials for hydrogen storage: a step forward toward a sustainable H₂ economy. Advanced Sustainable Systems, 2022. 6(11): p. 2200276.

Key words hydrogen, production, storage, hydrides, absorbers, porous ceramics, zeolites, aspect number

Abstract. The study is devoted to the processes of hydrogen absorption in porous ceramic materials and the study of the main approaches to solving the problem of hydrogen storage. Various modern methods for storing hydrogen in various states of aggregation are described, including storage in a liquefied form at low temperatures and in chemically bound forms such as metal hydrides. The results include the synthesis of porous materials for hydrogen absorbers, suggesting various types of hydrogen absorbers in the form of porous materials. The study shows the dependence of the degree of hydrogen absorption on the composition of the absorber and the temperature of hydrogen sorption. A ceramic porous material with a zeolite composition of sodium aluminosilicate (AlSiNaO) has been developed, exhibiting a high hydrogen absorption coefficient (13.2 wt.%).

Mirutkir Suleimanov Mirtemirovich

Mirjalol Nosirov Uljabay o'gli

Fayzullo Ernazarov Nazarmatovich

Payzullakhanov Saydivalikhanovich

Odilkhujab Parpiev Raimkhujayevich

Javokhir Shermatov Zafarovich

Maria Pecherskaya

Doctoral student, Institute of Materials science

Doctoral student, Institute of Materials science

Doctoral student, Institute of Materials science

Doktor of Technical science, head of laboratory Institute of Materials science

Doctor of Philosophy of Physical-mathematical sciences. Institute of Materials science, Director

Doctor of Philosophy of Technical sciences, head of laboratory Institute of Materials science

Institute of Materials science, junior researcher

СОДЕРЖАНИЕ

1. Химия и физикохимия композиционных материалов и нанокмпозитов

M.M. Suleimanov, M.U. Nosirov, F.N. Ernazarov, M.S. Payzullakhanov, O.R. Parpiev, J.Z. Shermatov, M. Pecherskaya. Ceramic porous absorber for a hydrogen storage.....	3
D.M. Tog‘aymurodova, O.S. Maksumova. Diatsetat sellulozani N-morfolin 3-xlor izopropil akrilat bilan modifikatsiyalash.....	5
А.П. Бектурсынова, З.К. Джуманазарова. Координационные соединения нитрата бария с бензамидом и ацетамидом	8
З.К. Джуманазарова, Ш.А. Кадилова, Н.Т. Каттаев. Комплексные соединения нитрата стронция с аминами	11
З.К. Джуманазарова, Ш.А. Кадилова, Н.Т. Каттаев. Координационные соединения нитратов магния и кальция с формамидом и карбамидом.....	14
M.X. Иногамова, С.С. Негматов, Д.Н. Раупова, Х.Ю. Рахимов, Д.Х. Мусабеков. Исследование влияния деэмульгатора на процесс разделения водонефтяных эмульсий.....	18
Д.А. Гафурова, Д.Н. Шахидова, Б.Т. Орзикулов, С.М. Икрамова, Н.М. Карабаева. Комплексообразующий ионит на основе полиакрилонитрила.....	20
А.А. Раҳмонқулов, Ж.О. Овлаев, Р.Т. Рузиев. Полиэтиленга модификаторнинг ўзаро таъсирини яхшилайдиган матрица қўшимчаларни киритиш ва фуллерен C ₆₀ модификацияси	23
Ж.Р. Тилаков, А.Ш. Хусенов, Г. Рахманбердиев, К.С. Ибрагимова, Т.А. Нишинов. Синтез полимерных комплексов на основе карбоксиметилинулина.....	25
D. Suyarova, Sh. Beknazarova, U. Abduraxmanova. Kadmiy xloridni glitserizin kislotali bilan olingan kompleksini fizik-kimyoviy tahlili.....	28

2. Физико-механика и трибология композиционных материалов

I.I. Xudoyberdiyev, N.Q. Xodjayeve, M.A. Maxkamov, J.F. Sharipov. Polianilin va nio asosida kompozitsiyalarning elektrofizik xossalarni tadqiq qilish.....	31
M.P. Амонов, Н.Р. Очилова, М.С. Шодиева. Матоларга гул босиш учун елимловчи композициялар хоссалари	34
A.X. Axmedov, M.U. Karimov, A.T. Djalilov. Olein-palmitin plastifikatsiyasi rezina qorishmalarida fizik-mexanik xossalari o‘rganilganligi.....	37
Ш.Н. Турахужаева, Х.К. Тожибоев, Н.Д. Тураходжаев, А.М. Абдувалиев, Х.З. Абдурахмонов, И.А. Носирхужаев, А.Н. Турахужаева. Исследования по определению оптимального режима при плавке алюминиево-литиевых сплавов.....	40
А.А. Тургунов, Н.С. Абед, М.Э. Икрамова, Р.Х. Солиев. Изучение взаимосвязи между фазовой структурой и физико-механическими свойствами смесей-полимер-полимерных композиций.....	41
С.С. Негматов, Н.С. Абед, Б.Т. Джабаров, Д.Н. Ходжаева. Влияние магнитного поля и содержания наполнителей на электрофизические свойства композиционных полимерных материалов.....	44
С.С. Негматов, Н.С. Абед, Б.Т. Джабаров, Ш.А. Бозорбоев. Создание электроизоляционных композиционных материалов путем регулирования их электрофизических и физико-механических свойств.....	48
С.С. Негматов, З.А. Азизов, Н.С. Абед, Р.Х. Солиев. Исследование физико-механических свойств термопластичных полимеров и характеристики органоминеральных наполнителей для разработки антифрикционно-износостойких композиционных полимерных материалов, работающих при контактом взаимодействии с хлопком-сырцом.....	52
Д.И. Махкамов, С.С. Негматов, Н.С. Абед, Р.Х. Солиев, М.А. Ахмаджанов, Д.Х. Нурхонов. Физико-химические и механические свойства упруго-деформационно-сдвигуустойчивых композиционных асфальтобетонных материалов и покрытий для автомобильных дорог	56
Д.И. Махкамов, С.С. Негматов, Н.С. Абед, Р.Х. Солиев, М.А. Ахмаджанов, Д.Х. Нурхонов. Упруго-дф-сдвигуустойчивые композиционные асфальтобетонные материалы для покрытий автомобильных дорог..	59
N.B. Xolmirzayev, N.I. Sadikova, Z.B. Nurdinov, O.Ch. Yo‘ldoshev, I.S. Nosirxo‘jayev. Ti elementining 35XГCЛ markali po‘lat qotishmasining yeyilishbardoshlik xossasiga ta’siri.....	61
Ф.Х. Нормаматов. Реологические свойства суспензии и растворов, образующихся при получении нитрата калия и хлорида аммония при конверсии хлорида калия с нитратом аммония.....	64
У.Н. Шабарова. Куяқлаштирувчи композицияларнинг эксплуатацион, физик-механик ва колористик хоссалари.....	67
Н.З. Худайкулов. Анализ истираемости сварочных агломерированных флюсов.....	70